Tecnotrip
VACUUM PACK TECHNOLOGY

Tecnotrip
VACUUM PACK TECHNOLOGY

EVA9-11

Single chamber automatic download vacuum packing machine



Meat slaughterhouses

Factories

Packaging centers

Ideal for packaging products of considerable volume...
Suitable for large productions.
Recommended for slaughterhouses, sausage factories, fish...

The **EVA-9-11** is ideal for:

Cheeses · Sausages · Meats · Fishes and seafood · Vegetables · IV and V Range · Pasta & pizzas

Nuts · Sauces · Canning jars · Coffee · Nougat · Pastries · Non-Food

Tecnotrip, S.A.
C/ L'Alguer, 22 · Pol. Ind. Nord
08226 Terrassa (Barcelona) España
Tel.: +34 93 735 69 69
WhatsApp: 695 781 799
tecnotrip@tecnotrip.com

tecnotrip.com youtube

Tecnotrip
VACUUM PACK TECHNOLOGY


We design, manufacture and market.

Seriousness, commitment, quality and service... loyalty to our customers.

EVA9-11

Single chamber
automatic download
vacuum packing machine



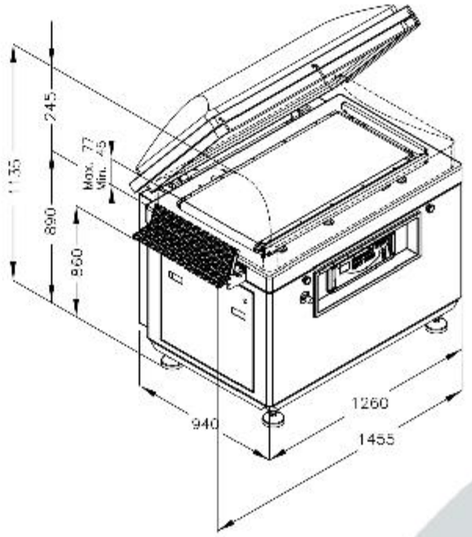

EVA-9-11



EVA-9-11. Easy removal of the conveyor belt for cleaning.



EVA-9-11. Regulation of conveyor belt height (motorised option in automatic line).



PA-9-11. The automatic leveling of the two belts facilitates the movement of the product, ensuring a perfect placement.



EVA-9-11. Sample of aluminium bag sealed with our Bioactive system.



RET-A-4 / RET-A-4-11. Raisig of the conveyor belt to facilitate cleaning of interior tank.

Automatic packaging and shrinking line

EVA-9-11 + RET-A-4/11 + PA-9-11

Sealing bars

Packaging programs



Gas

Sealing options



Ideal for fully automatic vacuum packing lines, as it fully synchronized with pre-feed and shring tanks.
A conveyor belt ligting system inside the packer allows products placed in the pre-feed to pass inside the machine perfectly positioned to start packaging cycle.
By pressing a puch button, the vacuum packaging cycle will start: closure, packaging process and expulsion of the products automatically
A cell located at the entrance of the tank, dettects the passage of the packaged product and iniciate the shringing cycle: entry, immersion, draining and ejection of the product.
At the end of the retracting tank, is is possble to incorporate a bag dryer mod. TSA.

Features

Easy cleaning
Manufacture according to CE standard

Equipment

Pump: 250 m³/h
Digital programmer: CD system
Sealing: SS, SC, SD, SB
Gas
Right download

Technical data

	EVA-9-11	PA-9-11	RET-A-4	RET-A-4-11
Exterior dimensions/mm:	1455x940x1135	1165x770x1240	1730x930x1590	1900x1100x1655
Chamber dimensions/mm:	1175x665x300		870x440x285	1270x945x1390
Cycles/min:	2/3		5/7	5/7
Power/Kw:	7,5	5,5	30	30
Compressed air/bar:	6	6	6	6
Electrical connection:	220/380V 50/60Hz 3ph	220/380V 50/60Hz 3ph	220/380V 50/60Hz 3ph	220/380V 50/60Hz 3ph
Weight/kg:	550	120	273	315

Information about the digital programmer

30 programs to select
Vacuum control by sensor
Supplementary vacuum function
Progressive vacuum program
Gas control by sensor
Progressive air inlet “SOFT-AIR”
Control tape speed
Manual stop vacuum
Cycle counter
Oil change control
Pump preheating program
Sealing control
**see descriptions on the web*