Tecnotrip
VACUUM PACK TECHNOLOGY

EVC27/26

Automatic loading and unloading vacuum packing machine



Meat slaugtherhouses

Factories

Packaging centers

Ideal for packaging products of considerable volume such as meats, ham centers...

Suitable for large productions.

Recommended for slaughterhouses, sausage factories, fish...

The **EVC-26** ***and*** **EVC-27** are ideal for:

Cheeses

Sausages

Meats

Fishes and seafood

Vegetables

IV and V Range

Pasta & pizzas

Nuts

Sauces

Canning jars

Coffee

Nougat

Pastries


Non-Food

Tecnotrip
VACUUM PACK TECHNOLOGY


We design, manufacture and market.
Seriousness, commitment, quality and service... loyalty to our customers.

EVC27/26
Automatic loading and unloading vacuum packing machine



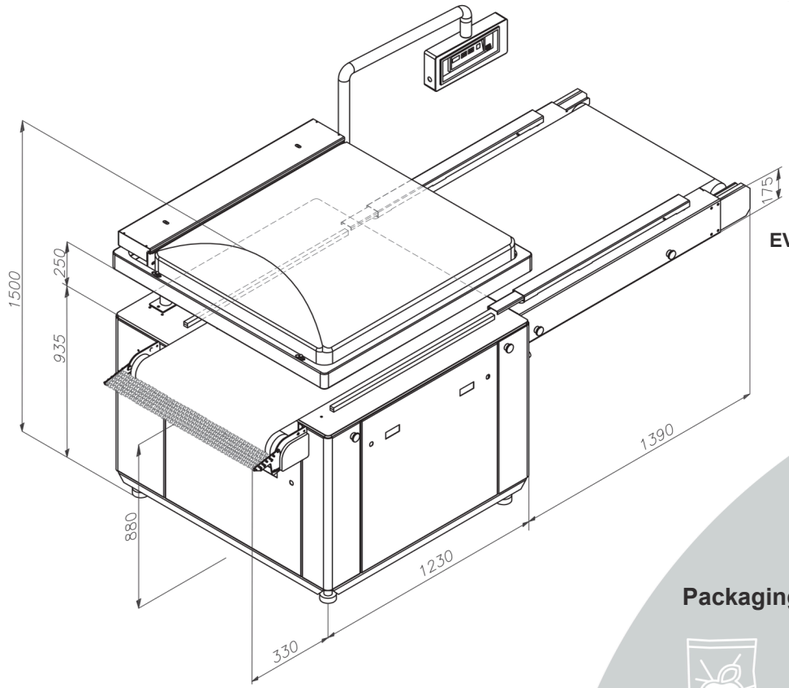


EVC-26/27

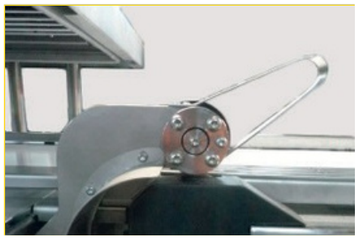

Pre-cut option of bag excess cut.




Extensible and directional control panel.

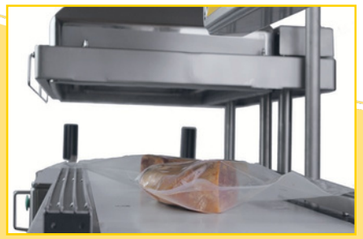


Easy handling of the product to be packaged, unhindered between the prefeeding tape and the vacuum chamber.

Automatic packaging and shrinking line
EVC-26/27 + RET-A-4/11

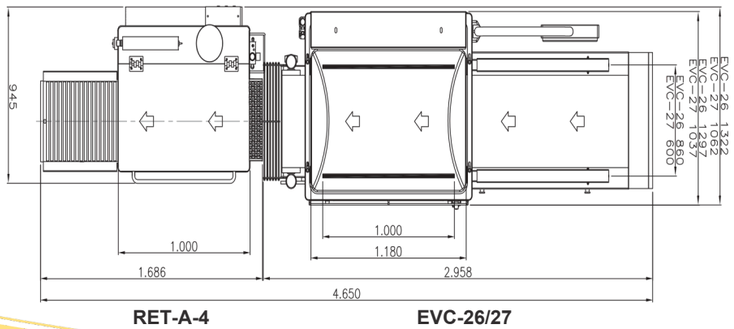

RET-A-4 **EVC-26/27**


Sealing bars

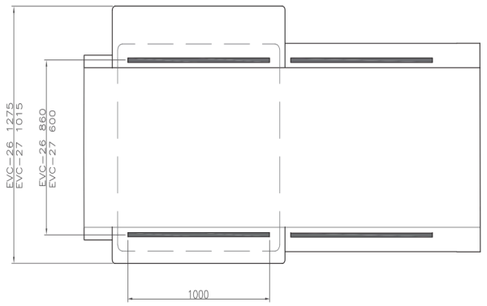

Packaging programs

Sealed | Vacuum | Vacuum + Gas

Sealing options

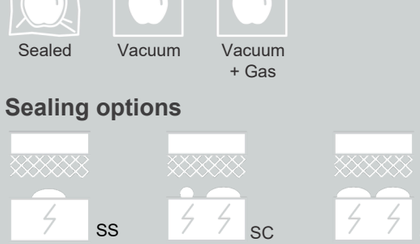

SS Simple sealing
SC Simple sealing + excess cut individualy adjusted
SD Individually adjustable double sealing

Ideal for fully automatic vacuum packaging lines, as it is fully synchronized with shrinking tanks...
By pressing a pushbutton, the vacuum packaging cycle will start: closure, packaging process and product and iniciate the shringing cycle; entry, immersion draining and ejection of the product.
At the end of retracting tank, it is possible incorporate a bag dryer

Features
Easy cleaning Manufacture according to CE standard

Features
Pump: 1X250 or 2x250 m3/h
Digital programmer: CD
system Sealing: SS, SC, SD

Technical data	EVC-26	EVC-27	RET-A-4	RET-A-4-11
Exterior dimensions/mm	2950x1275x1500	*2950x1015x1500*	*1730x1000x1590*	*1900x1120x1590*
Chamber dimensions/mm	1020x1145x305	*1175x760x305*	*900x450x320*	*1100x545x320*
Cycles/min	2/3		*5/7*	*57*
Power/Kw	15	*15*	*30*	*30*
Compressed air/bar	6	*6*	*6*	*6*
Electrical connection	220V 50/60Hz 1ph	*220V 50/60Hz 1ph*	*220V 50/60Hz 1ph*	*220V 50/60Hz 1ph*
Weight/kg	950		*273*	*315*

Information about the digital programmer

30 programs to select
Vacuum control by sensor
Supplementary vacuum function
Progressive vacuum program
Gas control by sensor
Progressive air inlet “SOFT-AIR”
Vacuum verification program
Manual stop vacuum
Test program
Cycle counter Oil change control
Pump preheating program
Simple sealing

**see descriptions on the web*

Tecnotrip
VACUUM PACK TECHNOLOGY

Tecnotrip, S.A.
C/L'Alguer, 22·Pol. Ind. Nord
08226 Terrassa(Barcelona) España
Tel.: +34 93 73569 69 WhatsApp:
695781 799
tecnotrip@tecnotrip.com

tecnotrip.com youtube